



## COMPACT 2032 E COMPACT 2632 E

### Optimum compactness

- Width of 2 ft 7 in to operate in the most congested areas
- Compact stowed height for easy access through standard doorways

### Exceptional productivity

- Load capacity up to 770 lbs (Compact 2032 E)
- Driveable at full height
- Extended platform
- Long working cycles

### Reliable and easy to maintain



**Haulotte**   
GROUP

More than lifting






# COMPACT 2032 E / COMPACT 2632 E

## ELECTRIC SCISSOR LIFTS

### TECHNICAL DATA


**COMPACT 2032 E****COMPACT 2632 E**

|  |                     |                     |
|--|---------------------|---------------------|
| Working height                             | 26 ft 4 in          | 32 ft 3 in          |
| Platform height                            | 20 ft 4 in          | 26 ft 3 in          |
| Driveable at full height up to             | 20 ft 4 in          | 26 ft 3 in          |
| Lift capacity - inside                     | 770 lbs             | 500 lbs             |
| Lift capacity - outside                    | 265 lbs             | N/A                 |
| <b>A</b> Platform length - outside         | 7 ft 7 in           | 7 ft 7 in           |
| <b>B</b> Platform length - extended        | 10 ft 7 in          | 10 ft 7 in          |
| Extension length                           | 3 ft                | 3 ft                |
| <b>C</b> Platform width - outside          | 2 ft 8 in           | 2 ft 8 in           |
| <b>E</b> Storage height                    | 3 ft 8 in           | 4 ft 4 in           |
| <b>D</b> Height - stowed                   | 6 ft 7 in           | 7 ft 2 in           |
| <b>F</b> Overall width                     | 2 ft 8 in           | 2 ft 8 in           |
| <b>G</b> Length                            | 8 ft 2 in           | 8 ft 2 in           |
| <b>H</b> Wheelbase                         | 6 ft 1 in           | 6 ft 1 in           |
| <b>I</b> Ground clearance                  | 5 in                | 5 in                |
| Ground clearance - Pothole guards deployed | 1 in                | 1 in                |
| Drive speed                                | 0.6 - 2.1 mph       | 0.6 - 2.0 mph       |
| Gradeability                               | 23 %                | 23 %                |
| Lift / lower speed                         | 26 s / 37 s         | 36 s / 42 s         |
| Turning radius - outside                   | 7 ft 10 in          | 7 ft 10 in          |
| Non-marking tires                          | 15x5                | 15x5                |
| Batteries                                  | 24 V - 260 Ah (C20) | 24 V - 260 Ah (C20) |
| Hydraulic system capacity                  | 7.1 gal             | 7 gal               |
| Weight                                     | 3,649 lbs           | 4,829 lbs           |

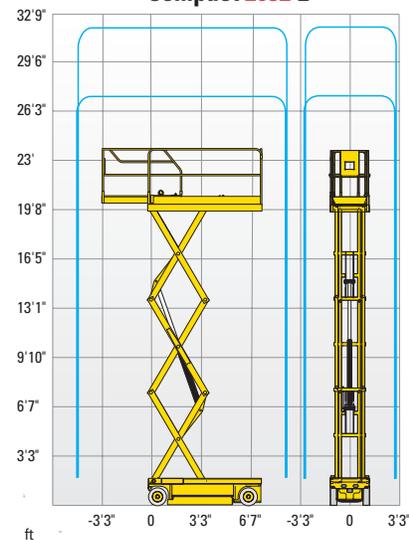**Compact 2032 E  
Compact 2632 E**

### STANDARD EQUIPMENT

- Pothole protection
- Battery charge indicator
- Proportional lift and drive
- Fold down guardrails (2632 E)
- Slideout battery compartment
- Battery charger 110V / 60Hz
- Non-marking tires
- Free wheeling device
- Tilt alarm
- Load management system in the platform
- Manual platform lowering valve
- Forklift pockets
- Towing hooks
- Horn
- Hour meter

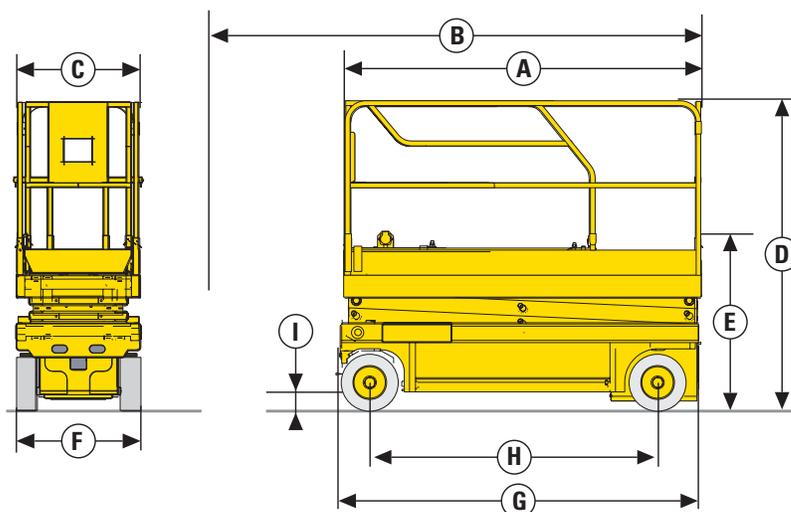

### OPTIONS AND ACCESSORIES

- Flashing beacon
- Motion alarm (travel and elevate)
- 70 W platform working light
- Power to the platform
- Biodegradable hydraulic oil
- Folding guardrails (2032E)
- Centralized battery filling